


Vestal V250 F/S Specification Sheet


Free standing or Under bench

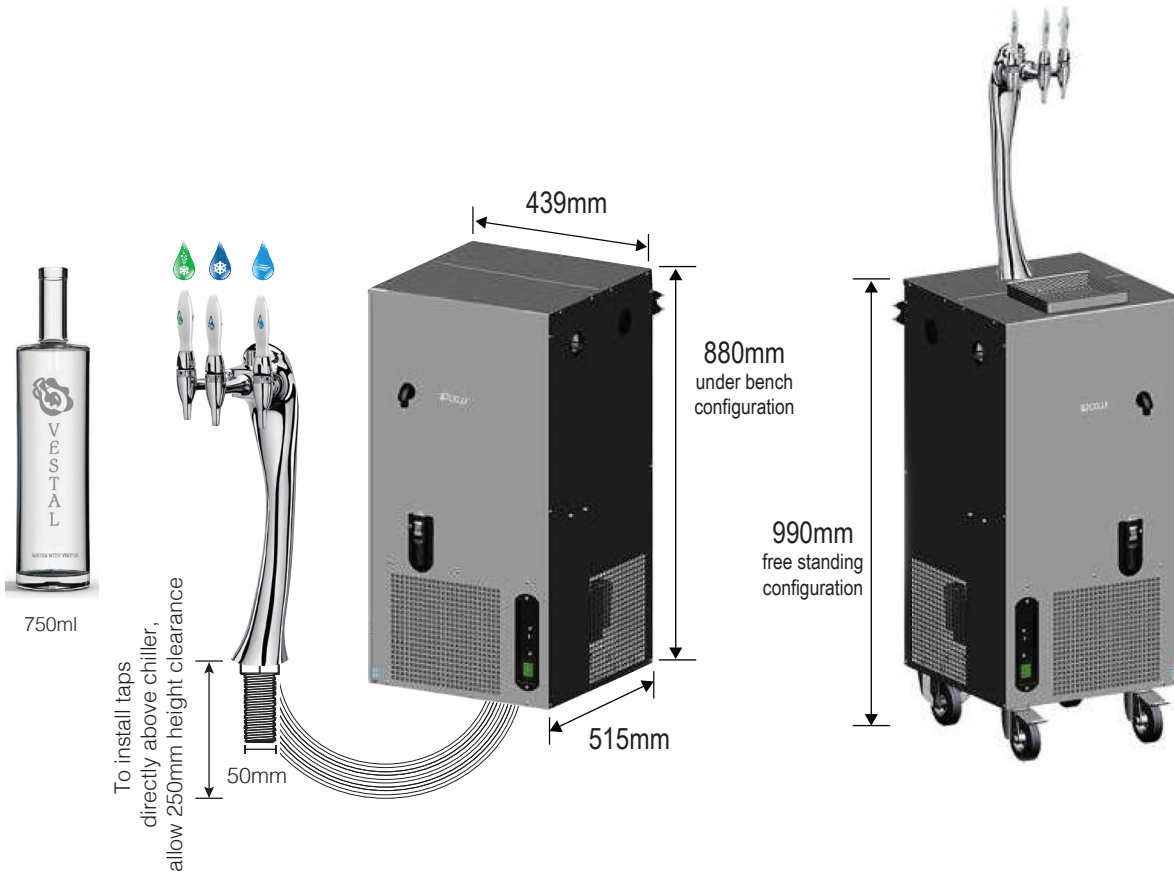

CAPACITY

- Suitable for venues with 100+ seats
- Can be installed free-standing or under-bench
- Supplied to dispense filtered ambient and chilled still water, plus chilled sparkling water


FILTRATION OPTION



- **Cafe Twin**
 - Single Sub Micron high capacity filter (90,000 litres)
 - Bespoke filtration available on request
- 400mm (H)
250mm (W)
150mm (D)

NOTES

- Chiller box requires a 200mm air gap all round. For tight spaces, optional auxiliary fans are available.
- A potable cold water supply and 10amp 240V GPO (on a dedicated circuit) must be within 1 metre of the chiller box.
- CO₂ cylinders are not supplied by Vestal and must be obtained separately, minimum 6kg or 10kg Food Grade CO₂.



- CO₂ supply / bottle (10kg)
750mm X 220mm

Technical Data

Power*: 230V - 50Hz 10amp
Chilling Capacity: 250 litres per hour

*(Must be on a dedicated circuit)



AU/NZ Watermark Certified

Contact Details

Vestal Water Pty Ltd

1800 VESTAL Email: info@vestalwater.com
1800 837 825 Website: www.vestalwater.com

